


FITTING INSTRUCTIONS FOR WALL AND CEILING LIGHTS

VERY IMPORTANT - This luminaire must be installed in accordance with British Standard 7671 : the requirements for electrical installations. (IEE wiring regulations).

IF YOU ARE IN ANY DOUBT ABOUT THIS INSTALLATION PLEASE CONSULT A COMPETENT ELECTRICIAN
THIS LUMINAIRE MUST BE EARTHED


The electricity supply must always be isolated at it's source (fuse box) before attempting installation or maintenance. The luminaire must be fitted with bulbs which do not exceed the maximum stated wattage.

CEILING LIGHTS

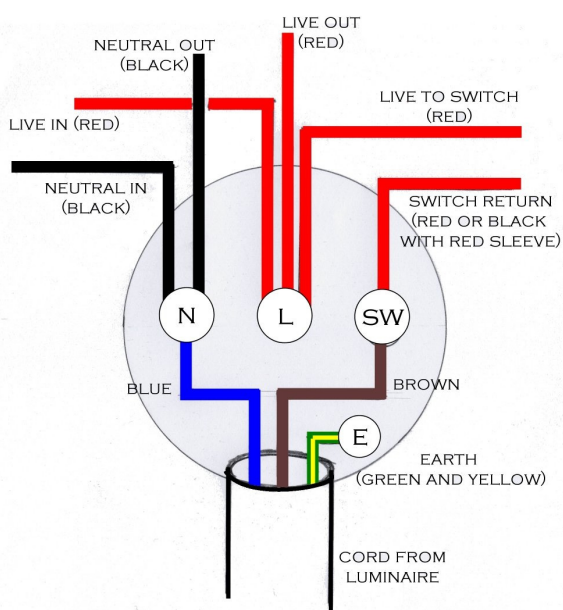

IMPORTANT - YOUR LIGHT FITTING IS SUPPLIED WITH GENERAL PURPOSE FIXINGS SUITABLE FOR FITTING TO A SOUND SURFACE. YOU MAY FIND THAT THERE ARE SOME SITUATIONS THAT REQUIRE MORE SPECIALIST FIXINGS. IF YOU ARE IN ANY DOUBT WE ADVISE YOU TO SEEK PROFESSIONAL ADVICE. PLEASE ENSURE THAT THE POSITION CHOSEN FOR THE CEILING LIGHT IS BENEATH A JOIST OR BATTEN SUITABLE TO SUPPORT THE WEIGHT OF THE LIGHT FITTING.

- Mark the drilling position on the ceiling to correspond with the fixing holes on your light fitting and drill holes taking care not to damage the electrical supply cables.
- Carefully secure the light to the ceiling using the screws provided and taking care not to trap any wires.
- Where appropriate adjust the height of the chain as required.
- Make electrical connections as shown in the diagram opposite.
- If your luminaire is not at the end of a wiring spur then there will be an extra pair of wires together (loop wires) in the supply wiring which could be coloured black or red. These should be connected together using a fourth approved terminal block (not supplied). If in doubt consult a qualified electrician

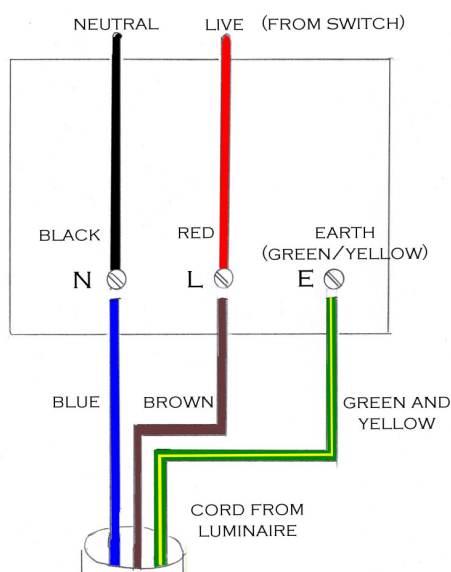

WALL LIGHTS

- These wall lights are only suitable for use with flush wiring.
- The design of the wall light requires that the connections are housed within a suitable flush mounted box.
- Mark the drilling position on your wall to correspond with the fixing holes on your light fitting.
- Drill holes taking care not to damage the electrical supply cables.
- Make electrical connections as shown in the diagram opposite.
- Carefully secure the wall light to the wall using the screws provided and taking care not to trap any wires.

Any problems with fitting? – just give us a call on 01226 766618

Bullhouse Mill - Lee Lane - Millhouse Green – Sheffield - South Yorkshire - S36 9NN